




WEARWELL®

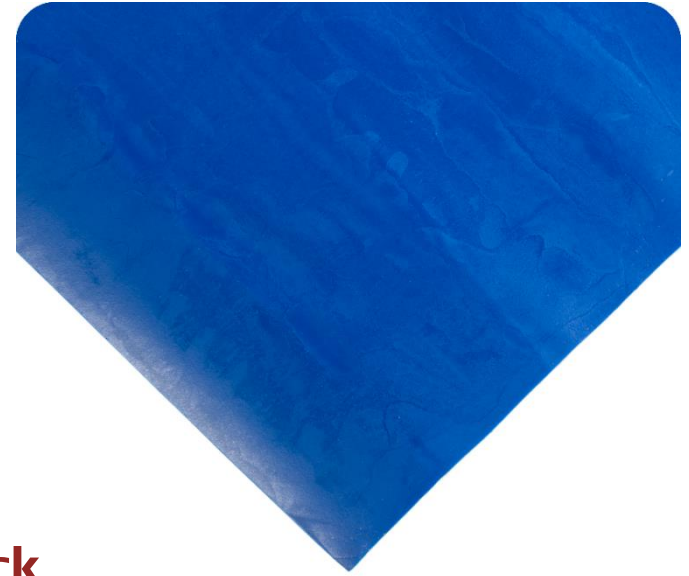

Technical Information:

Coefficient of Friction: 2.02 (ASTM C1028), 4.05 TORTUS

Load Resistance: 1200 PSI.

Heat Resistance 32° F to 123° F; 0 °C to 50° C

Length* Standard

*These vary depending on specific customer needs.

Toxicity: Non-toxic

X-Rays: No Effect

Gamma Rays: No Effect

Outgassing: Negligible

ESD Features: Dissipative

Chemical Resistance: Resistant to most chemicals

Bacteria Resistance: Prevents common bacteria (tested on pseudomonas aeruginosa and staphylococcus aureus.)



PermaTack

PermaTack is designed for serious long term contamination control. The unique "tacky" surface removes up to 98% of contaminants from shoes. Just clean the surface and the mats "tackiness" returns. Protect critical environments like labs, clean rooms and pharmacies with PermaTack.

- Permanently tacky blue PVC surface
- Adhesive backing holds mat securely in place
- Static Dissipative surface
- Clean using 25% ammonia / 75% water or non-abrasive, non-oil based cleaners with pH between 4 and 8.
- Overall thickness 1/8"

Product Specifications:

Thickness: Standard of 90 -100 mils

Width*: Standard width up to 4 ft.

Length*: Standard length from 1 ft (.3m) to 50 ft (15m)

Item Number	Size
092.18x27x10BL	27" x 10'
092.18x27x20BL	27" x 20'
092.18x27x48BL	27" x 48"
092.18x27x72BL	27" x 72"
092.18x36x54BL	36" x 54"
092.18x54x10BL	54" x 10'
092.18x54x20BL	54" x 20'

NORTH AMERICA

WEARWELL, INC. (HEADQUARTERS)
PHONE: 615.254.8381 OR 1.800.264.3030
INFO@WEARWELL.COM
WWW.WEARWELL.COM

UK & IRELAND

WEARWELL EUROPE LTD
PHONE: 44.1844.212117
INFO@WEARWELL-EUROPE.CO.UK
WWW.WEARWELL.EU

MAINLAND EUROPE

WEARWELL EUROPE LTD
PHONE: 31.548.659061
EUROPE@WEARWELL.EU
WWW.WEARWELL.EU