

Every day, companies take the field in the world's most demanding and competitive team sport — business! Wearwell can provide you and your industrial athletes with a competitive edge through our innovative surfaces. Our team works onsite with safety managers and facility owners to create the best flooring solutions for industrial environments.

## **SLIP, TRIP AND FALL STATS**

3<sup>rd</sup> leading cause of missed work days and 4<sup>th</sup> leading cause of work related death

\$13.5 billion. The annual national Workers' Comp cost of same level falls (the 2<sup>nd</sup> most costly among workplace injuries)

**\$41,531**. The average cost of a slip and fall claim.

**\$85,648**. The average cost of a head injury claim.

**42%.** The increase of Workers' Comp costs for slips and falls in the past 11 years.

NATIONAL SAFETY COUNCIL 2012 Edition of Injury Facts

Committee to the Control of the Cont

## **INDUSTRY FOCUS**

- General Manufacturing
- Automotive
- Energy Exploration
- Metal Fabrication

### FIELD SURFACE: CONCRETE

- Wet, oily and slippery
- Hard and unforgiving
- Difficult and costly to maintain

#### **EFFECTS**

- Poor traction
- Unsure footing slows productivity
- Frequent slip and fall incidents
- More severe impact injuries
- Loss days from work
- Higher costs


## **SOLUTION**

# ErgoDeck® with Integrated No-Slip Cleats

ErgoDeck with Integrated No-Slip Cleats delivers a sure-footed work surface for maximum productivity, performance and safety.

Like professional playing surfaces, gritted products give some temporary traction but wear with use and become slippery with saturation. Cleats are a tried and true means to overcome such harsh conditions.



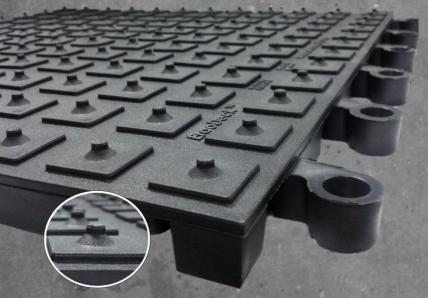

Structural base for maximum cleat strength

Style	Wearwell No.	UOM
Solid	552.78x18x18BK-C510	Case of 10
Drainage	553.78x18x18BK-C510	Case of 10
Ramps	560.75x6x18YL-CS10	Case of 10
Outside corner	560.75x6x15x15YL-CS4	Case of 4
Inside corner	560.75x6x9x9YL	Each

#### PROBLEM SOLVED

**Slip Prevention.** Long lasting, high performance traction.

COF (wet or dry) 1.10 per ASTM F 1677-05

**Trip Prevention.** Wide ramps provide smooth transition to reduce tripping

**Visual cue.** Yellow edging defines work areas and calls attention to the change in surface.

**Maintenance.** Can withstand power washing, scrubbing and aggressive cleaning.



**Ease of Installation.** Robust 7/8" thick tiles are 18" x 18" to cover large areas quickly with no tools required.

**Customize.** Cut and connect in 3" increments to fit any area.

**Secure.** Positive Interlock System prevents separation yet zips apart on demand

**Value.** Easily replace single tiles or sections as needed.

#### **SURFACE MATTERS!**

Wearwell, Inc. (North America)
Phone: 1-615-254-8381
E-mail: info@wearwell.com
WWW.WEARWELL.COM

Wearwell Europe Ltd (UK & Ireland)
Phone: 44-1844-212117
info@wearwell-europe.co.uk
WWW.WEARWELL-EUROPE.CO.UK

Wearwell Europe Ltd (Mainland Europe)
Phone: 31-548-659061
europe@wearwell.eu
WWW.WEARWELL.EU