


WEARWELL®

24/SEVEN® LockSafe® GR with GRITSHIELD® IS THE ULTIMATE SOLUTION FOR DEMANDING MANUFACTURING ENVIRONMENTS.

24/SEVEN® LockSafe® GR with GRITSHIELD® is the perfect anti-fatigue solution for the slickest areas. GRITSHIELD is a specially formulated anti-slip surface treatment which dramatically improves traction and coefficient of friction. GRITSHIELD prevents slips and allows workers to walk with confidence in slippery environments. The drainage design is ideal for dealing with liquids and overspray. Installation is quick and easy- the large 3'x3' rubber tiles interlock interlock with no tools required while the patented LockSafe connection system keeps tiles from separating during use.




GR Rubber




Slip resistant

GR Rubber (Grease Resistant)

GR Rubber (Grease Resistant) is a proprietary blend of SBR which has excellent resistance to the most common fluids, including water and cleaning solutions with a pH between 4 and 9. GR Rubber provides exceptional resistance to slips, abrasion, sudden impact, and cutting which makes it a popular choice for applications where durability is critical.

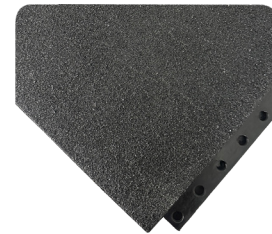

584

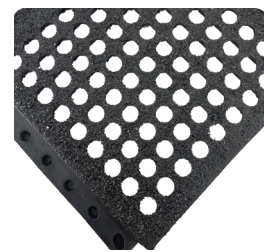

586

| COMPOUND | PART NUMBER | PRODUCT | SIZE | COLOR |
|----------|---------------------------------------|--|-------------------------------------|--------|
| GR | 584.58x3x3GRBK | 24/Seven® LockSafe® GR with GRITSHIELD | 3x3 Ft. (.91cm x.91cm) | Black |
| GR | 586.58x3x3GRBK | 24/Seven® LockSafe® GR with GRITSHIELD | 3x3 Ft. (.91cm x.91cm) | Black |
| SBR | 578.EdgingFGRYL/578.EdgingFGRBK | LockSafe® GR Rubber Female Ramp | 5/8" x 3" x 3Ft.(16mm x 8cm x 91cm) | BYL/BK |
| SBR | 578.EdgingMGRYL/578.EdgingMGRBK | LockSafe® GR Rubber Male Ramp | 5/8" x 3" x 3Ft.(16mm x 8cm x 91cm) | BYL/Bk |
| SBR | 578.CornerGRYL-CS4/578.CornerGRBK-CS4 | LockSafe® Outside Corner | 5/8" x 3" x 3"(2mm x 8cm x 8cm) | BYL/BK |

3X3 FT. INTERLOCKING MODULAR TILE

3x3 Ft. (.91x.91 m) interlocking modular tile allows you to quickly cover small or large areas, as well as reconfigure when operations change, reducing labor costs and making it easy to adapt to change.

5/8 OVERALL THICKNESS

5/8 In. (15.875 mm) thick heavy-duty construction provides exceptional durability and long-lasting performance in the harshest environments, reducing costs from frequent replacements.


SLIP RESISTANT

The addition of GRITSHIELD provides more traction with a better coefficient of friction, making it ideal for environments where slips and falls are a concern.



MAXIMIZE DRAINAGE & AIRFLOW

Robust design allows placement directly on open grates, maximizing drainage and airflow while creating a safe and ergonomic walking surface.

Wearwell's patented LockSafe interlock system snaps together and actively holds secure during use, keeping workers safer by preventing tile separation and slips, trips, and falls.

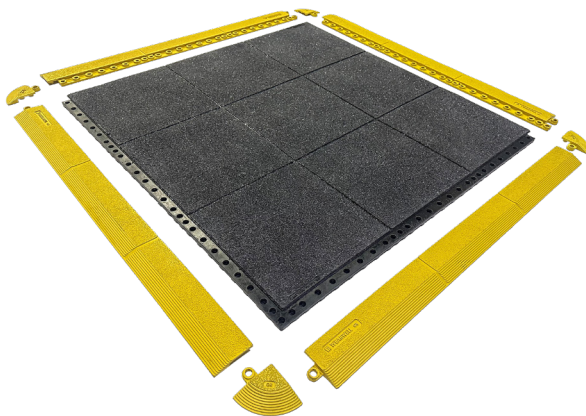

Positive Interlock System

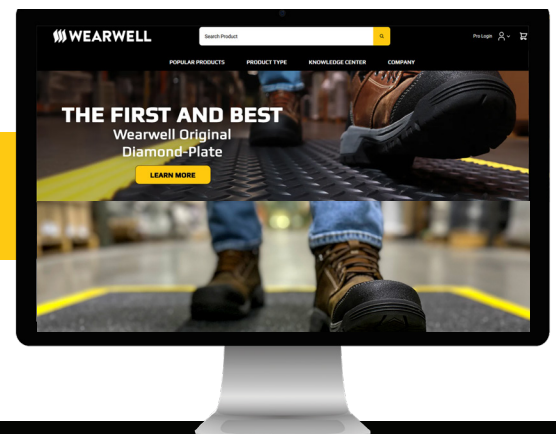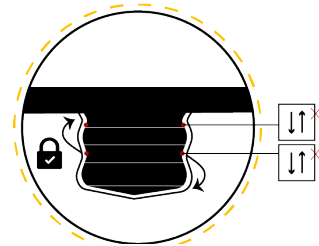

VISIT WWW.WEARWELL.COM OR CALL 800.264.3030 TO PLACE YOUR ORDER

NORTH AMERICA

Wearwell, Inc. (Headquarters)
Phone: 615.254.8381 or 1.800.264.3030
info@wearwell.com
www.wearwell.com

UK & IRELAND

Wearwell Europe LTD
Phone: 44.1525.307271
info@wearwell-europe.co.uk
www.wearwell.com

EUROPE

Wearwell Europe LTD
Phone: 44.1525.307271
europe@wearwell.eu
www.wearwell.com