

Vinyl Sponge Mats



An excellent choice for practical and economical comfort, these mats reduce floor hardness up to 50% and can easily be cut on-site to fit your work areas.

- Tuf Sponge No. 451
- Deluxe Tuf Sponge No. 442
- Diamond Tuf Sponge No. 452
- SoftStep No. 427
- Deluxe SoftStep No. 444


The primary differences between these mats are thickness and surface design. Otherwise, they all contain the same specifications and pass the same testing that you would expect from a quality Wearwell product.

SPECIFICATIONS AND TESTING

COMPOUND	Blown-vinyl sponge
EDGES	Safety rounded on stock sizes/rolls. Safety beveled on cut ends.
FLAMMABILITY	DOC FF1-70: Flame-retardant rating
COEFFICIENT OF FRICTION	ASTM F1677: Dry: .94 (.60 for SoftStep mats)
TABOR ABRASION	Fed. Std. 191 Modified: < 2% lost @ 1,000 cycles
WARRANTY	1 year


RIBBED

Tuf Sponge No. 451 and Deluxe Tuf Sponge No. 442

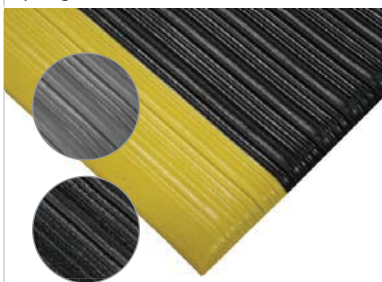


PEBBLED

SoftStep No. 427 and Deluxe SoftStep No. 444

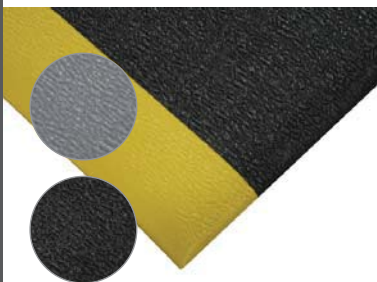

DIAMOND

Diamond Tuf Sponge No. 452

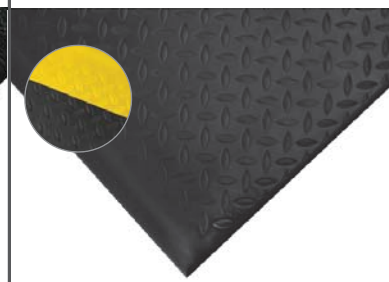

STOCK ITEMS

THICKNESS	3/8"	5/8"	3/8"	5/8"	1/2"
2' x 3'	451.38x2x3	442.58x2x3	427.38x2x3	444.58x2x3	452.12x2x3
3' x 5'	451.38x3x5	442.58x3x5	427.38x3x5	444.58x3x5	452.12x3x5
3' x 12'	451.38x3x12	n/a	427.38x3x12	n/a	n/a
2' x 60'	451.38x2x60	442.58x2x60	427.38x2x60	444.58x2x60	452.12x2x60
3' x 60'	451.38x3x60	442.58x3x60	427.38x3x60	444.58x3x60	452.12x3x60
4' x 60'	451.38x4x60	442.58x4x60	427.38x4x60	444.58x4x60	452.12x4x60
6' x 60'	n/a	n/a	n/a	n/a	n/a

NON-STOCK ITEMS

THICKNESS	3/8"	5/8"	3/8"	5/8"	1/2"
2' cut up to 60'	451.38x2CUT	442.58x2CUT	427.38x2CUT	444.58x2CUT	452.12x2CUT
3' cut up to 60'	451.38x3CUT	442.58x3CUT	427.38x3CUT	444.58x3CUT	452.12x3CUT
4' cut up to 60'	451.38x4CUT	442.58x4CUT	427.38x4CUT	444.58x4CUT	452.12x4CUT
6' cut up to 60'	451.38x6CUT*	n/a	n/a	n/a	n/a

6' wide available in black only. 2', 3', and 4' widths are available in Black (BK) or Black/Yellow (BYL).

2', 3', and 4' cuts up to 60' are available.